



INVESTOR IN PEOPLE




The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

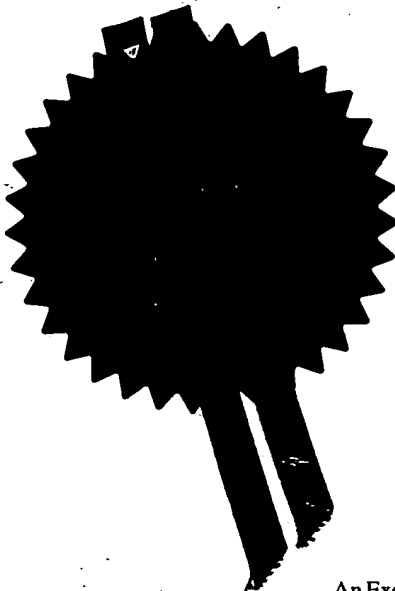


Signed

*W. Evans*

Dated 5 September 2000

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

*This Page Blank (uspto)*

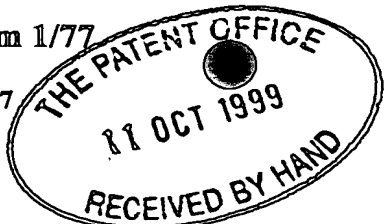The  
Patent  
Office

1/77

12 OCT 99 5403290-1 00247  
POL/7700 0.00 - 9924033.5

## Request for grant of a patent

*(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

HL72082/000/DCO

2. Patent application number  
*(The Patent Office will fill in this part)*

11 OCT 1999

9924033.5

3. Full name, address and postcode of the or of  
each applicant *(underline all surnames)*TELEFONAKTIEBOLAGET LM ERICSSON  
S-126 25 Stockholm  
SwedenPatents ADP number *(if you know it)*If the applicant is a corporate body, give the  
country/state of its incorporation

Sweden

703730001

4. Title of the invention  
RADIO TRANSCEIVER5. Full name of your agent *(if you have one)*

Haseltine Lake &amp; Co.

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
*(including the postcode)*Imperial House  
15-19 Kingsway  
London WC2B 6UDPatents ADP number *(if you know it)*

34001

6. If you are declaring priority from one or more  
earlier patent applications, give the country  
and the date of filing of the or of each of these  
earlier applications and *(if you know it)* the or  
each application number

Country

Priority application number  
*(if you know it)*Date of filing  
*(day/month/year)*7. If this application is divided or otherwise  
derived from an earlier UK application,  
give the number and the filing date of  
the earlier application

Number of earlier application

Date of filing  
*(day/month/year)*8. Is a statement of inventorship and of right  
to a grant of patent required in support of  
this request? *(Answer "Yes" if:*  
a) *any applicant named in part 3 is not an inventor, or*  
b) *there is an inventor who is not named as an applicant, or*  
c) *any named applicant is a corporate body.*  
*See note (d))*

Yes

# Patents Form 1/77

9. Enter the number of sheets of any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 6

Claim(s) 3

Abstract 1

Drawing(s) 1

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to a grant of patent (*Patents Form 7/77*) 1

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*) -

Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application

Signature

Haseltine Lake & Co

Date

8 October 1999

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. D.C. O'Connell


[0117] 9103200

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

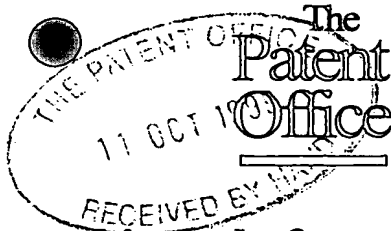

7/77

# Statement of inventorship and of right to grant of a patent

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference HL72082/000/DCO

2. Patent application number  
(if you know it)

11 OCT 1999

9924033.5

3. Full name of the or of each applicant

TELEFONAKTIEBOLAGET LM ERICSSON

4. Title of the invention

RADIO TRANSCEIVER

5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent

By virtue of the inventor's contract of employment

6. How many, if any, additional Patent Forms 7/77 are attached to this form?  
(See note (c))

7.

I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.

Signature

Date

Harettine Lake o/o

8 October 1999

8. Name and daytime telephone number of person to contact in the United Kingdom

Mr. D.C. O'Connell

[0117] 9103200

## Notes

- If you need help to fill in this form or you have any questions, please contact the patent office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the patent office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Johan Nilsson

Nordlindsväg 94A  
S-217 73 Malmö  
Sweden

778360001

Patents ADP number (if you know it)

Patents ADP number (if you know it)

Patents ADP number (if you know it)

Reminder:  
Have you signed this form?

RADIO TRANSCEIVER

TECHNICAL FIELD

5 This invention relates to radio transceivers, and more particularly to methods of controlling the power at which such transceivers transmit.

BACKGROUND OF THE INVENTION

10 In a radio communication system, such as a radio telecommunications system having base stations and large numbers of mobile stations which may be in communication with each base station, it is necessary to control the power with which signals are transmitted. For example, it is advantageous to reduce transmit power as far as practicable, but the transmit power must be high enough to provide a required signal level at the receiver. In the case of a direct sequence code division multiple access (DS-CDMA) system, the signals transmitted from the different mobile stations should preferably all be received at the base station at the same level.

20 Power control is performed by measuring the signal-to-interference ratio (SIR), and controlling the transmit power so that this reaches a target value.

For example, US-5,778,030 describes a spread spectrum communication system, in which a base station sends an adjustment signal to a mobile station, to control the power of transmissions from the mobile station. The adjustment signal is calculated to increase the power level if the received power level is below a threshold, and to decrease the transmit power level if the received power level is above a threshold. The threshold is set at a value which depends on the measured speed of the mobile station.

35 The paper "SIR-Based Transmit Power Control of Reverse Link for Coherent DS-CDMA Mobile Radio", by Seo, et al, IEICE Trans. Commun. Vol.E81-B, No. 7 July

1998 pp1508-1516, describes an alternative system. In that system, the transmit power of a mobile station is controlled in response to a TPC (transmit power control) signal sent from a base station. The TPC is calculated on the basis of a comparison performed in the base station between, on the one hand, an estimate of the signal-to-interference (SIR) ratio of signals received from the mobile station at the base station and, on the other hand, a target signal-to-interference value. The speed of movement of the mobile station is mentioned as a parameter which has an effect on the optimum size of the steps in which the TPC signal can be controlled.

#### SUMMARY OF THE INVENTION

A feature of a mobile radio communication system is fading, that is, the variation with time of the quality of a radio channel.

The present invention proceeds from a recognition that, when a mobile station is moving slowly, it is advantageous to control the transmit power thereof to follow, and compensate for, fading of the channel. However, when a mobile station is moving quickly, it will generally not be possible to control the transmit power sufficiently quickly to compensate for a fast fading channel.

According to the present invention, there are provided a radio transceiver, and a method of control thereof, in which a quality measure of received signals, for example the signal-to-interference ratio, is estimated using an algorithm which depends on the measured or estimated velocity of a mobile station.

#### BRIEF DESCRIPTION OF DRAWINGS

Figure 1 is a block schematic diagram of a transceiver according to the present invention.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS



Figure 1 shows a transceiver according to one aspect of the present invention, in the form of a mobile station 2, which is in communication with a base station 4. For example, the mobile station may  
5 communicate with the base station using a wideband code division multiple access (W-CDMA) system.

As shown in Figure 1, the mobile station 2 includes an antenna 6, and transceiver circuitry 8, which are conventional and well known to the person  
10 skilled in the art, and will not be described further herein.

The mobile station 2 also includes a signal-to-interference ratio (SIR) estimator 10, and a velocity estimator 12.

The base station 4 includes an antenna 14, and transceiver circuit 16, which are generally conventional and well known to the person skilled in the art, and will not generally be described further  
15 herein.

The SIR estimator 10 of the mobile station 4 is used to control the quality of a signal received from the base station 4. In general terms, if a signal is received at too low a power level, data will be lost. However, it is disadvantageous for transmissions to be  
20 made at power levels which are higher than necessary, as this is a potential source of interference.

Thus, as is generally known, the SIR estimator 10 receives pilot symbols and data symbols from the transceiver circuitry 8, and uses them to estimate the  
25 signal power and interference power. According to the present invention, however, the SIR estimator 10 uses an estimation algorithm which has a velocity estimate as an input thereto.

Thus, the velocity estimation circuit 12 estimates  
30 the velocity of the mobile station 2, for example

estimating its velocity relative to the fixed base station 4 by observing the spreading of the received signals in the frequency domain, as a result of the Doppler effect. More details of one technique for velocity estimation are given for example in US-5,778,030 discussed above. The estimated value of the velocity is then supplied to the SIR estimator 10, and used as an input to the algorithm used therein.

For example, when the mobile station is moving at a low velocity, it becomes possible to follow fast fading of the radio channel. Therefore, it is advantageous to use a fast SIR estimation algorithm. When the mobile station is moving at a high velocity, it is no longer possible to follow fading of the radio channel. Therefore, it is preferable to control a mean value of the signal-to-interference ratio, and so it is advantageous to use a slow SIR estimation algorithm.

For example, the speed of the algorithm, and bandwidth of the estimator, affect the noise properties of the estimate.

SIR estimation algorithms are known to the person skilled in the art, and any suitable algorithms can be chosen in accordance with the invention. For example, the SIR estimator may be able to use both a fast estimation algorithm and a slow estimation algorithm, and may switch between them depending on whether the estimated velocity of the mobile station is below or above a threshold velocity. Alternatively, the SIR estimator may implement an estimation algorithm which uses the estimated velocity of the mobile station as a parameter therein, again to have the effect that, when the mobile station is moving at a low velocity, the SIR estimation algorithm is relatively fast, and, when the mobile station is moving at a high velocity, the SIR estimation algorithm is relatively slow. A suitable

algorithm can be defined by the person skilled in the art.

As mentioned above, the estimated value of the signal-to-interference ratio is compared with a threshold value. The signal-to-interference ratio threshold value is itself set by a control loop which attempts to achieve a desired value of a quality measure of the received signal. For example, the target quality measure could be the bit error rate or frame error rate.

Based on the comparison of the signal-to-interference ratio with the threshold value, a power control signal is sent from the mobile station to the base station 14, and acted upon in the transceiver circuitry 16 of the base station. If the signal-to-interference ratio is lower than the threshold value, a power control signal is sent to increase the transmit power of the base station, and, if the signal-to-interference ratio is higher than the threshold value, a power control signal is sent to decrease the transmit power of the base station.

The invention has been described above in relation to a system in which a mobile station estimates the signal-to-interference ratio of signals received thereby, and then sends a signal to a base station to control the power of transmissions therefrom. It will be appreciated that the invention can be applied also to a system in which a base station estimates the signal-to-interference ratio of signals received from a mobile station using a similar method for estimating the velocity of the mobile station relative to the base station, and then sends a signal to the mobile station to control the power of its transmissions.

The invention has been specifically described with reference to its use in a CDMA system. However, it

will be apparent that the invention can also be used for signal-to-interference ratio estimation, and therefore also for power control if desired, in time division multiple access (TDMA) systems.

5           There is therefore described a transceiver which allows better control of the transmission powers in a mobile communications system, by adapting the signal quality estimation algorithm to the velocity of movement of the transmitting or receiving mobile  
10           station.

CLAIMS

1. A radio transceiver, comprising:  
a receiver, for receiving radio signals;  
a quality estimator, for estimating a first  
5 measure of quality of received radio signals; and  
a speed estimator, for obtaining a measure of  
relative velocity of the transceiver,  
wherein the measure of relative velocity is used  
as an input to the quality estimator.

10 2. A radio transceiver as claimed in claim 1,  
wherein the estimated first measure of quality is the  
signal-to-interference ratio.

3. A radio transceiver as claimed in claim 2,  
further comprising:

15 a comparison circuit, for comparing the estimated  
signal-to-interference ratio with a threshold value  
thereof; and

a control circuit, for transmitting a power  
control signal to a further transceiver, based on the  
20 result of said comparison.

4. A radio transceiver as claimed in claim 3,  
wherein the signal-to-interference ratio threshold  
value is set to achieve a target value of a second  
measure of quality.

25 5. A radio transceiver as claimed in claim 4,  
wherein the second measure of quality is a bit error  
rate.

6. A radio transceiver as claimed in claim 4,  
wherein the second measure of quality is a frame error  
30 rate.

7. A radio transceiver as claimed in claim 1,  
wherein the quality estimator uses an estimation  
algorithm having a response speed, and the response  
speed of the estimation algorithm is controlled in  
35 response to the measure of velocity of the transceiver.

8. A radio transceiver as claimed in claim 7, wherein the response speed of the estimation algorithm is controlled such that a first higher response speed is used in the event of a low measure of velocity of the transceiver, and a second lower response speed is used in the event of a high measure of velocity of the transceiver.

9. A mobile station, including a radio transceiver as claimed in one of claims 1 to 8.

10. A base station, including a radio transceiver as claimed in one of claims 1 to 8.

11. A method of estimating quality of received radio signals in a transceiver, comprising:

obtaining a measure of relative velocity of the transceiver; and

estimating the quality using an estimation algorithm, including using the measure of relative velocity as an input to the estimation algorithm.

12. A method as claimed in claim 11, wherein the estimated measure of quality is the signal-to-interference ratio.

13. A method as claimed in claim 11, wherein the quality estimation algorithm has a response speed, and the response speed of the estimation algorithm is controlled in response to the measure of relative velocity of the transceiver.

14. A method as claimed in claim 13, wherein the response speed of the estimation algorithm is controlled such that a first higher response speed is used in the event of a low measure of velocity of the transceiver, and a second lower response speed is used in the event of a high measure of velocity of the transceiver.

15. A radio receiver, comprising:

a speed estimator, for obtaining a measure of

relative velocity of the receiver, and

a quality estimator, for carrying out an algorithm to obtain a measure of quality of received signals, the being supplied as an input to the quality estimator.

5           16.     A radio receiver as claimed in claim 15, wherein the algorithm is selected on the basis of the measure of relative velocity.

17.     A method of estimating quality of radio signals received in a receiver, comprising:

10           obtaining a measure of relative velocity of the transceiver; and

estimating the quality using an estimation algorithm, including using the measure of relative velocity as an input.

15           18.     A method as claimed in claim 17, comprising using the measure of relative velocity to select an appropriate estimation algorithm.

ABSTRACT

RADIO TRANSCEIVER

5 A radio transceiver, for example a mobile station  
for use in a code division multiple access (CDMA)  
system, estimates the signal-to-interference ratio of  
received signals, for use in power control of  
transmissions thereto. The estimation algorithm, used  
to estimate the signal-to-interference ratio, is  
10 altered based on the estimated relative velocity of the  
transceiver.



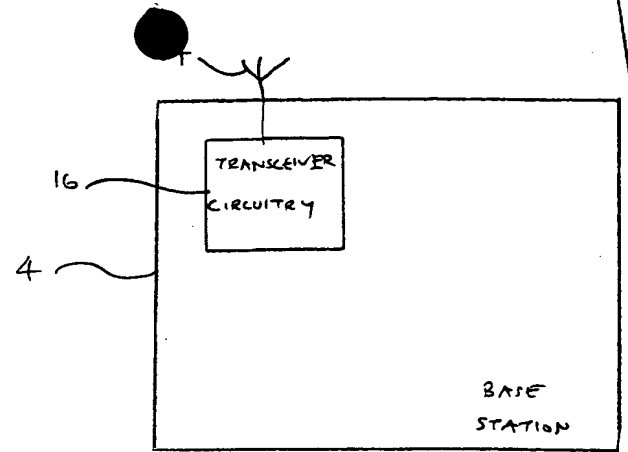
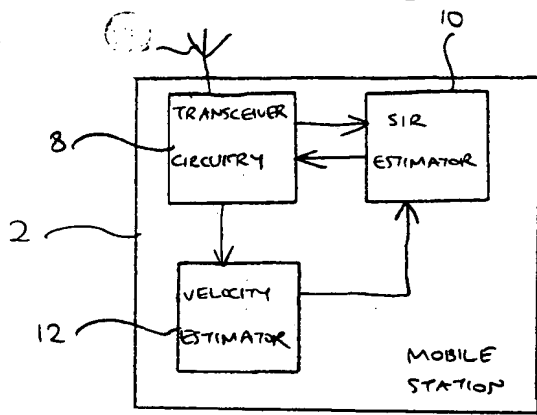


FIGURE 1

P11261 - Draft 1

*This Page Blank (uspro)*